


# MI Type #: D / M8 Type #: 3

ITEM	SPECIFICATIONS
A.	26 AWG 19X.0040" TINNED COPPER STRANDING
B.	6 MIL SR-PVC INSULATION PER AWM 10535 5 MIL MIN SR-PVC INSULATION OD: .031±.001"
C.	POLY FILLER AS NEEDED FOR ROUNDNESS
D.	TISSUE PAPER SEPARATOR
E.	30 MIL PRESSURED TPU JACKET 24 MIL MIN BLACK TPU JACKET
	UL RECOGNIZED & CSA CERTIFIED
	ROHS3 DIRECTIVE (EU) 2015/863 TO AMEND ANNEX II TO EU ROHS 2, 2011/65/EU WITH NO EXEMPTIONS



**MINIMUM BEND RADIUS: 10X O.D.**

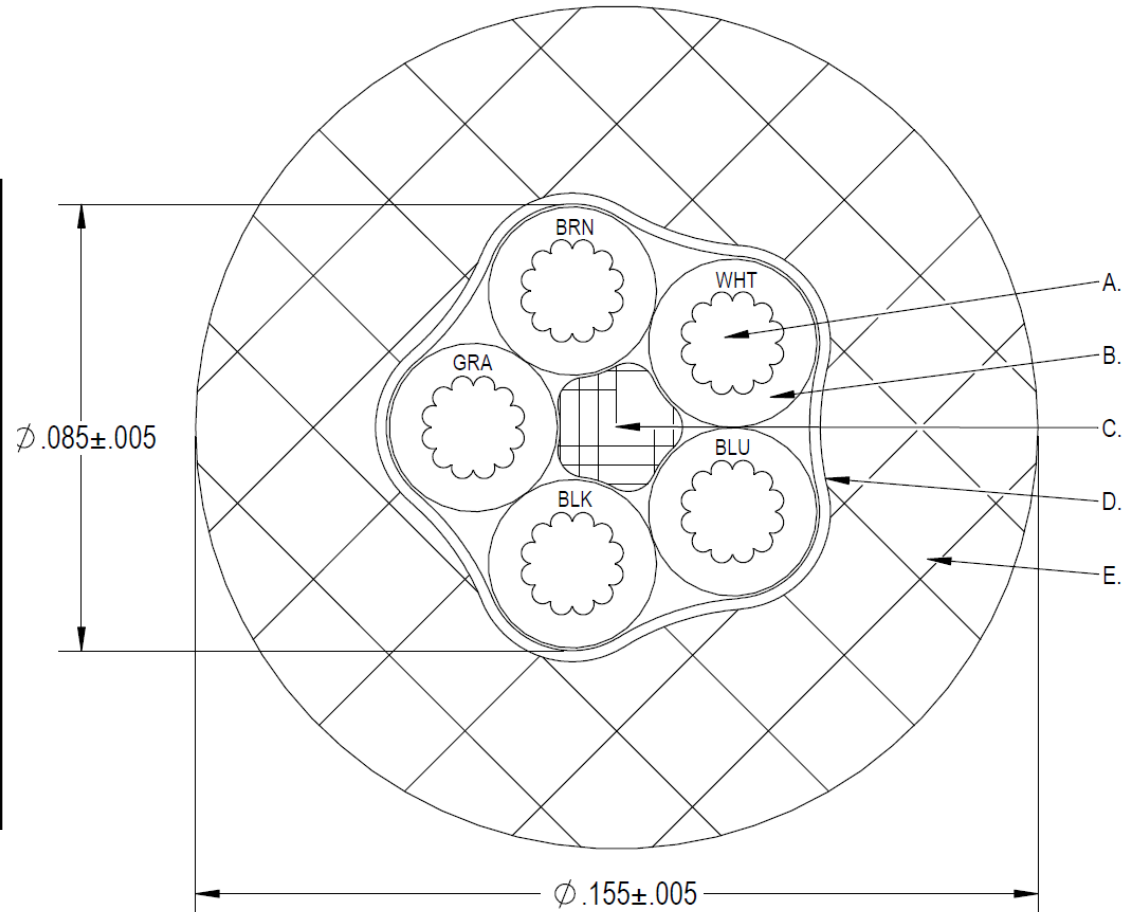

**COMPONENTS EXPRESS, INC.**  
10330 Argonne Woods Drive, Ste100  
Woodridge, IL 60517

**REF: 2605CU**

**Rev. 1, 11/26/2019** Update: 2/17/22