



M8

INDUSTRIAL I/O CABLES

PART NUMBER REFERENCE: **M8 - XX - X - XX - XX M**

Select Connector Type: End "1" (See Next Pg.)

- | | |
|-------------------|-------------------|
| M8, 2P Female = A | M8, 5P Female = G |
| M8, 2P Male = B | M8, 5P Male = H |
| M8, 3P Female = C | M8, 6P Female = J |
| M8, 3P Male = D | M8, 6P Male = K |
| M8, 4P Female = E | M8, 8P Female = L |
| M8, 4P Male = F | M8, 8P Male = M |

Select Connector Orientation: End "1" Straight Exit = A

Right Angle: B = 360°, C = 145°, D = 90°, E = 135°, F = 180°, G = 225°, H = 270°, J = 315°

Cable Type Options:

- | |
|------------------------|
| 28 AWG, 5C = 1 |
| 22 AWG, 5C, HIFLEX = 2 |
| 26 AWG, 5C HIFLEX = 3 |
| 28 AWG, 8C = 4 |

Select Connector Type: End "2" (See Next Pg.)

- | | |
|-------------------|-------------------|
| M8, 2P Female = A | M8, 5P Female = G |
| M8, 2P Male = B | M8, 5P Male = H |
| M8, 3P Female = C | M8, 6P Female = J |
| M8, 3P Male = D | M8, 6P Male = K |
| M8, 4P Female = E | M8, 8P Female = L |
| M8, 4P Male = F | M8, 8P Male = M |

X on end "2" denotes Flying Leads = X

Select Connector Orientation: End "2" Straight Exit = A

Right Angle: B = 360°, C = 145°, D = 90°, E = 135°, F = 180°, G = 225°, H = 270°, J = 315°

Length in Meters: 0.3 – 60

Temp: 02-28-22

CONNECTOR TYPES: M8

A



M8, 2P Female

B



M8, 2P Male

C



M8, 3P Female

D



M8, 3P Male

E



M8, 4P Female

F



M8, 4P Male

G



M8, 5P Female

H



M8, 5P Male

J



M8, 6P Female

K



M8, 6P Male

L




M8, 8P Female

M



M8, 8P Male

X

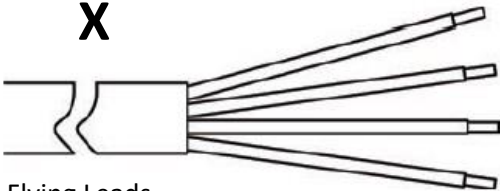

Flying Leads

(Approximate 50 mm. Cut-Back)

Additional Dimensional Information:

For additional information regarding the physical dimensions of our connector profiles, Please visit our Web-Site: www.ComponentsExpress.com
Or call to speak to one of our sales associates and we will be happy to assist.

Temp: 02-28-22