

MVA Type #: 5 & MI Type #: 4

SPEC No.:	19/0.1TA*8.5PR+AB 85%						
Customer		Customer NO.		8Code:	34120131	Sample NO:	W99021103
UL File NO.	E101344	UL Style:	UL 20279	Date:	2/11/10	Spec NO:	6250G11U11754FT7----
CSA File NO.		CSA Style:		Edition:	Secondly edition	Operation NO:	0
Structure			Structure A				
Conductors	Structure AWG	AWG	26# (19/38)				
	Material	--	Tinned Copper				
	O.D.	mm	0.53 Ref				
Insulation	Material	--	SR-PVC				
	Diameter	mm	1.00±0.07				
	Average Thickness	mm	0.235 Ref				
	Color	--	AS Color Code				
Twist	Direction	--	Right (S)				
	Diameter	mm	2.00				
Layer	Direction	--	Right (S)				
	Pitch	mm	90 Ref				
	Diameter	mm	5.62 Ref				
Shielding 1	Material	--	--	AL-foil/mylar			--
	Conductive Side	--	--	Outside			--
	Overlap Rate	%	--	25			--
Shielding 2	Shield	--	Braid				
	Material	--	Tinned Copper				
	Coverage Rate	%	85MIN				
Jacket	Material	--	PU				
	Diameter	mm	7.5 ± 0.19				
	Average Thickness	mm	0.76				
	Extrusion	--	Solid				
	Externals	--	Plane				
	Color	--	U209 (黑色)				




COMPONENTS EXPRESS, INC.
10330 Argonne Woods Drive, Ste100
Woodridge, IL 60517

W99021103 (E0914)

Rev. A, 2/11/2010, 8/8/19

Draw NO.:

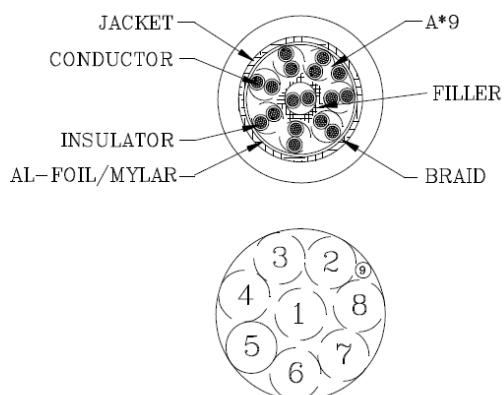

MINIMUM BEND RADIUS: 10X O.D.

COLOR CODE

- 1.BLACK*BLACK/WHITE (P570*P570/P579)
- 2.BROWN*BROWN/WHITE (P571*P571/P579)
- 3.YELLOW*YELLOW/BLACK (P574*P574/P570)
- 4.VIOLET*VIOLET/WHITE (P577*P577/P579)
- 5.PINK*PINK/BLACK (P600*P600/P570)
- 6.LIGHT-GREEN*LIGHT-GREEN/BLACK (P601*P601/P570)
- 7.LIGHT-BLUE*LIGHT-BLUE/BLACK (P602*P602/P570)
- 8.BLUE*BLUE/WHITE (P576*P576/P579)
- 9.GRAY (P578)

MI Type #: 4

SPEC No.:	19/0.1TA*8.5PR+AB 85%						
Customer		Customer NO.		8Code:	34120131	Sample NO:	W99021103
UL File NO.	E101344	UL Style:	UL 20279	Date:	2/11/10	Spec NO:	6250G11U11754FT7----
CSA File NO.		CSA Style:		Edition:	Secondly edition	Operation NO:	0

Electric Characters

- 1.Voltage rating : 30V
- 2.Temperature rating : 80°C
- 3.Spark test : AC- 500V/0.15 sec MIN.
- 4.Dielectric strength : AC- 750V/1 sec MIN.
- 5.Insulation resistance :SR-PVC: DC- 500V 10 MΩ/KM MIN. at 20°C
- 6.Conductor resistance : 26AWG -148 Ω/KM MAX. at 20°C

Physical Characters

- 1.Flame test of cable:
 - 1.1 :Cable Flame Test
- 2.Tensile strength test (before aging) :
 - 2.1 Sheath : > 1.05kg/mm²
 - 2.2 Insulation : >2.11kg/mm²
- 3.Tensile strength test (after aging) :
 - 3.1 Sheath : >70%
 - 3.2 Insulation : >70%
- 4.Elongation(before aging) :
 - 4.1 Sheath : >100%
 - 4.2 Insulation : >100%
- 5.Elongation(after aging) :
 - 5.1 Sheath : >65%
 - 5.2 Insulation : >70%
- 6.Requirements for green environment protection :Accord with RoHS



COMPONENTS EXPRESS, INC.
 10330 Argonne Woods Drive, Ste100
 Woodridge, IL 60517

W99021103 (E0914)
 Rev. A, 2/11/2010, 8/8/19

Approval	Frend	Auditor	Joan	Producer	ping
----------	-------	---------	------	----------	------