




Cable Type: 3

4.5GHz 3G/SDI RG6 Quad Shield Riser Rated Coaxial Cable

Material

CENTER CONDUCTOR	18 AWG Solid BC .040" OD
DIELECTRIC	Gas-Injected Foam PE .180" OD
SHIELD	100% Aluminum Foil 95% TC Braid
JACKET	Low Pressure PVC

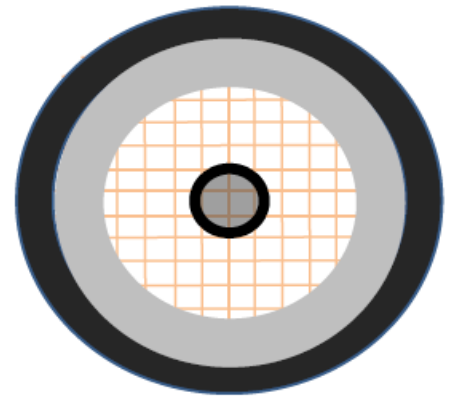

Characteristics

Impedance	Return Loss	DC Resistance	Capacitance	Vel. Of Prop.	Pulling Tension	Operating Temperature
75Ω (+/-2)	>23 db (1MHZ - 1.5GHz) >21 db (1.5GHz - 4.5GHz)	Conductor: 6.4Ω Shield: 2.8Ω/Mft	16.3 pF/ft	83%	70 lbs max.	-30°C to 75°C

Physical Dimensions

Coax Cable Description	Bandwidth GHz.	Flex Rating	Outer Jacket	RoHS Compliant	Nominal O.D. mm / In.	Bend Radius mm / In.
RG6 Quad Shield	4.5	STATIC	PVC	Yes	7.56 / .298	76.2 / 3.0

