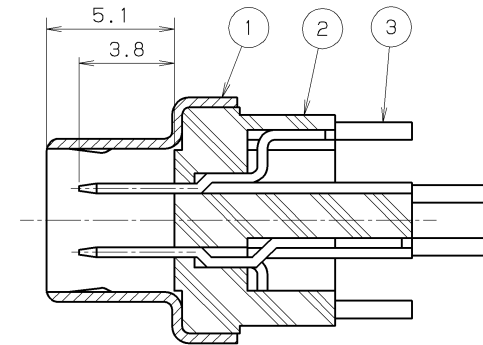
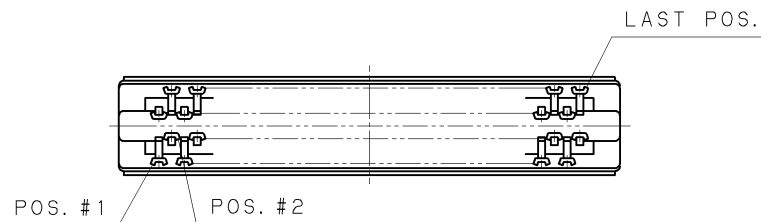
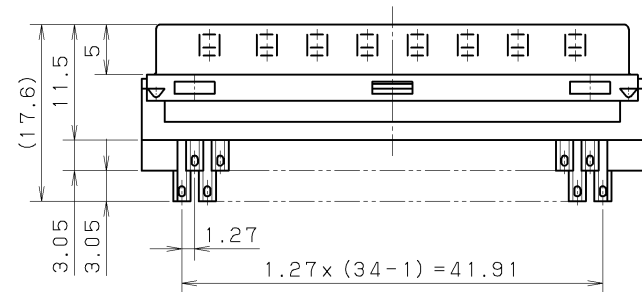
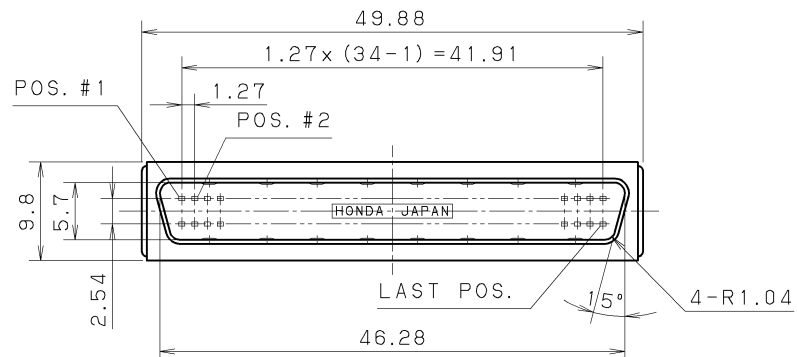


NOTE1. CONTACT PLATING
GOLD (0.2 μ m MIN.) ON MATING AREA,
GOLD (0.05 μ m MIN.) ON TERMINATION AREA,
ALL OVER NICKEL UNDERPLATED.

2. APPLICABLE CABLE COVER
P/N: PCS-SE68LDAU2N (SCS1-III)

△				3	CONTACT	PHOSPHOR BRONZE	NO. OF POS.	NOTE # 1	
△				2	INSULATOR	PPS (GF)	1		UL94V-0 BLACK
△				1	SHELL	STEEL	1	Ni PLATING	
LTR. DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE	SCALE	UNIT	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.					
MAY.21.2004	2 / 1	mm (INCH)							
APP. DATE&REV.									
DR.	DE.	CHK.	CHK.	APP.	NAME	PCS-XE TYPE MALE CONNECTOR (SCS1-II, III) (RoHS)			
T. KAWANO	T. KAWANO	T. SOGO	K. HOMMA	K. SATO	PART NO.	PCS-XES68MS+			
									REV.