


**RoHS COMPLIANT**


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/03/30	

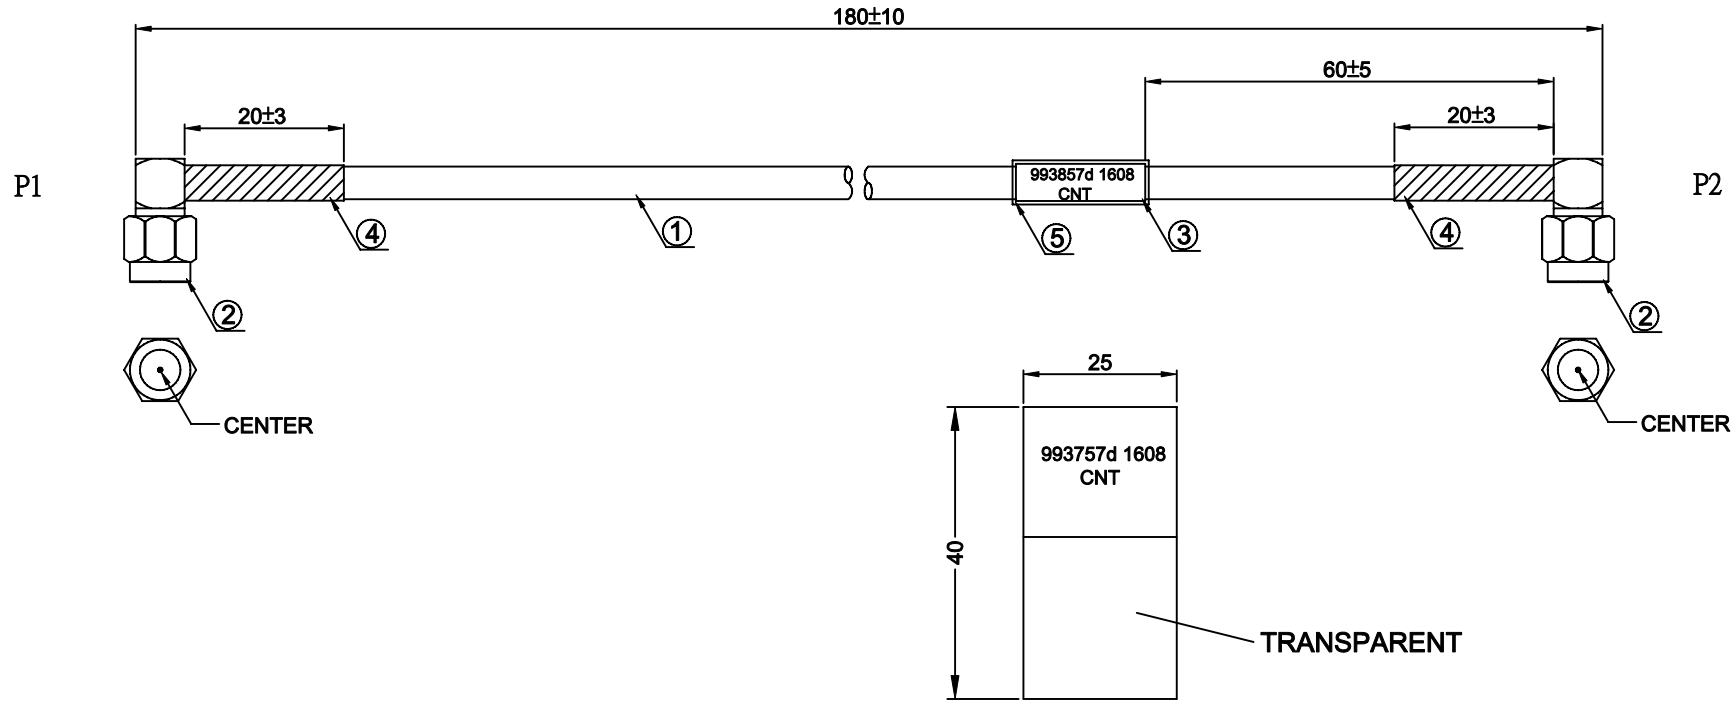

- NOTES:**
- PIN ASSIGNMENT SEE TO WIRE LIST.
  - ELECTRICAL TEST CONDITION:
    - 100% OPEN, SHORT & MISWIRE TEST,
    - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
    - CONTACT RESISTANCE: 1 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	1		TRANSPARENT TUBE.
4	2		BLACK TUBE.
3	1		LABEL.
2	2		90° SMA PLUG, GOLD PLATING (KENPOL:102-302-0002-AA).
1	1		RG402 COAX CABLE, OD:4.1MM.

**PIN ASSIGNMENT**

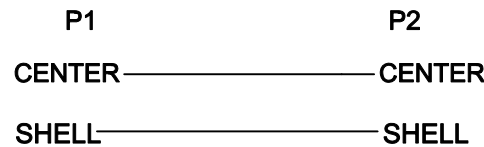

**Components Express, Inc**

	REV.	DWG NO: CY-S-0843		
	A	CUSTOMER:		
DRAW, BY: Yi jialu		CUSTOMER P/N: 993857C		
CHECK, BY: Cao		SCALE	UNIT	SHEET
APP, BY: Mr. Huang		FREE	mm	1/1